

SP_SSL_LEDDL104-CB SM 68W12/24V CustInfo RL 2019-07-22

9C1 3673700-EN-01

SP_SSL_LEDDL104-CB 68W 12/24V Cust. Info

Released
ECM

SP SSL&EL München 700
Moritz Schulz AMW




Template: ZOT 10000028

External no.:

Page 1 of 3


OSRAM GmbH: Chairman of the Supervisory Board: Peter Bauer; Managing Directors: Dr. Olaf Berlien (Chairman), Ingo Bank, Dr. Stefan Kampmann;
Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-No. DE 71568000

Lightbar FX500-CB SM - Customer Information Sheet LEDDL104-CB SM 12/24V

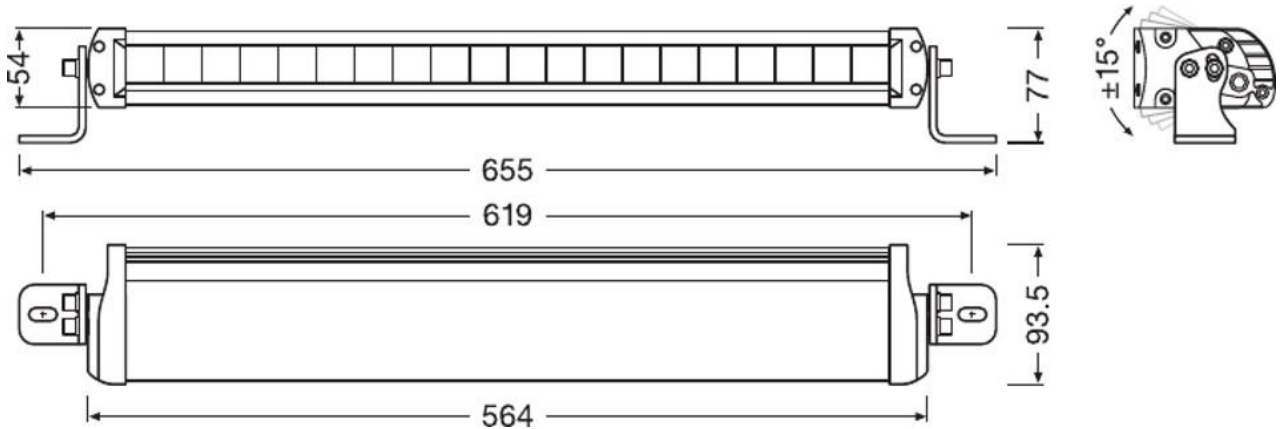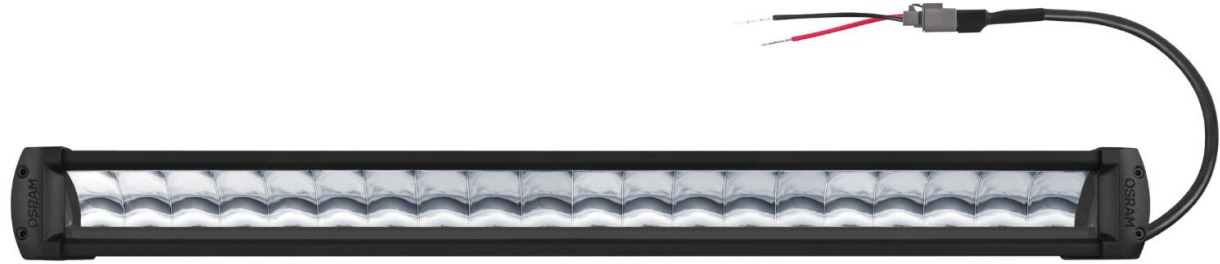

General tolerances in accordance with ISO 2768-v (Allgemeine Toleranzen nach ISO 2768-v)

Light distribution (Lichtverteilung)

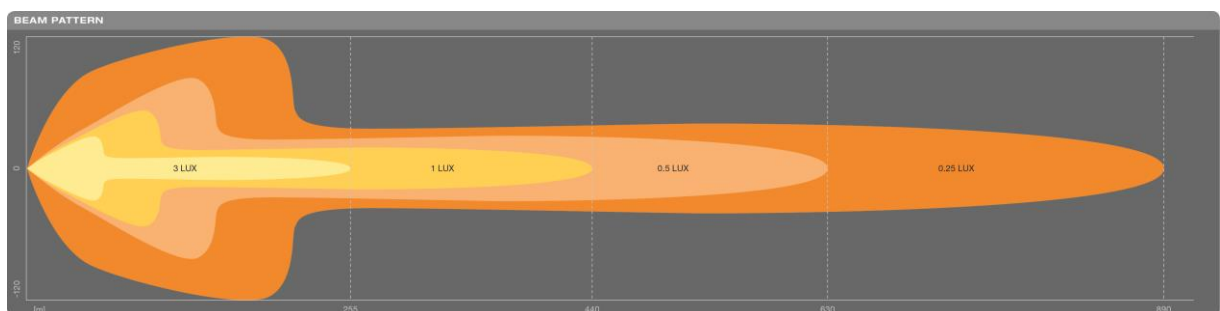

#OSRAM 0LQ(V)
#700 #MO.SCHULZ
#AMW #SP_SSL_LEDDL104-CB SM 68W12/24V CustInfo #
2019-07-22Z
#RL-Released
9C1 3673700-EN-01

SP_SSL_LEDDL104-CB SM 68W12/24V CustInfo RL 2019-07-22

9C1 3673700-EN-01

SP_SSL_LEDDL104-CB 68W 12/24V Cust. Info

Released
ECM

SP SSL&EL München 700
Moritz Schulz AMW

Template: ZOT 10000028

External no.:

Page 2 of 3

OSRAM GmbH: Chairman of the Supervisory Board: Peter Bauer; Managing Directors: Dr. Olaf Berlien (Chairman), Ingo Bank, Dr. Stefan Kampmann;
Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-No. DE 71568000

Packaging content (Verpackungsinhalt)

No.	Part Name	Description	Qty
1	LED Bar	Housing: AL with black powder painting	1
2	Side Bracket 1Set (2 pcs.)	Stainless Steel	1
3	M6*14 Hexagon Socket Head Cap Screw	Stainless Steel	4
4	M6 Plastic Spacer	Plastic	4
5	M6 Spring Washer	Stainless Steel	4
6	M6 Plain Washer	Stainless Steel	4
7	M8*45 Hexagon Socket Head Cap Screw	Stainless Steel	2
8	M8 Plastic Spacer	Plastic	2
9	M8 Spring Washer	Stainless Steel	2
10	M8 Plain Washer	Stainless Steel	2
11	M8 Self-locking Nut	Stainless Steel	2
12	User Manual		1

Standards and regulations (Normen und Vorschriften)

EMC/EMI	ECE R10
IP Class	IP67
ECE	2x ECE R112 (Ref. No. 25 + 25)
Other legal requirements	RoHS, REACH

Electrical and photometrical data (Elektrische und lichttechnische Daten)

Characteristics (Messwert)	Symbol	Unit (Einheit)	Major / Minor	Tolerance (Toleranz) [%]
Voltage (Spannung)	U	V	12/24V	9V-30V
Wattage (Leistung) @25°C	P	W	68W (typ.)	±10%
Steady State luminous flux (Lichtstrom) (30min. @25°C & 13,2V Goniometer: Vertical & horizontal : ±90°)	Φ	lm	5500lm	±10%

Life time (Lebensdauer)

Test (Prüfung)			
Life time average (@25°C)	Tc	h	5.000

Further specifications (Weitere Spezifikationen)

Test (Prüfung)	Rated value (Sollwert)	Test specification (Norm)
Color temperature (Farbtemperatur)	Cold White (6000K)	+/- 500K
Ambient Temperature range (Ta)	25°C	-30°C~+60°C
Storage Temperature range (Ts)	25°C	-40°C~+80°C
Derating, dimming	NTC protection dimming	
Light distance @1lx	≥410m	
Number of LED's	20	
Weight (light + application material)	2250g	±20g
Connector	Deutsch(DT04-2P,DT06-2S)	
Wire length	Lamp to connector: 100cm Pigtail wire: 15cm	±2cm ±3cm
Polarity	Polarity Protection	

Customer Information



Copyright © All rights reserved

Subject to change without notice. Errors and omissions excepted.

Printed by MO.SCHULZ at 03:19:26 EST 23.07.2019

SP_SSL_LEDDL104-CB SM 68W12/24V CustInfo RL 2019-07-22

9C1 3673700-EN-01

SP_SSL_LEDDL104-CB 68W 12/24V Cust. Info

Released
ECM

SP SSL&EL München 700
Moritz Schulz AMW

Template: ZOT 10000028

External no.:

Page 3 of 3

OSRAM GmbH: Chairman of the Supervisory Board: Peter Bauer; Managing Directors: Dr. Olaf Berlien (Chairman), Ingo Bank, Dr. Stefan Kampmann;
Registered office: Munich; Commercial registry: Munich, HRB 201526; WEEE-Reg.-No. DE 71568000

Process of manufacturing (Fertigungsprozess)

This product is designed and manufactured for the Automotive Aftermarket. Please consider the product specification to match the customer requirements. Dieses Produkt wurde für den Aftermarket entwickelt und produziert. Es ist unabdingbar, die Produktspezifikation mit den Kundenanforderungen abzugleichen.

Successive listing of changes (Änderungsfortschreibung)

Issue (Ausgabe):	Reason for change (Änderungsgrund):
22.07.2019	First Version

OSRAM OLQ (V)
#OSRAM

#700 #MO.SCHULZ

#AMW #SP_SSL_LEDDL104-CB SM 68W12/24V CustInfo #

2019-07-22Z

#RL-Released

9C1 3673700-EN-01